

## Features

- Wide voltage input 2:1
- DIP
- Operating temperature range: -40°C~+85°C
- Isolation 1500VDC 0.5mA 1Minute
- Internal SMD design
- Metal shell, high flame retardant plastic shell package
- Heat dissipation mode: natural air cooling
- Good shielding anti-interference performance and electromagnetic compatibility, lightning protection, output over current, short circuit protection, overheat protection, self-recovery and other functions

## Product Picture



EMC-EN55032


EN55035

LVD-EN62368


## Dimensions

### WRTD\_S\_-5W/6WH2 Series Dimensions


Front view

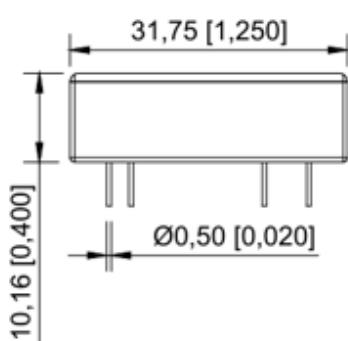

Top view

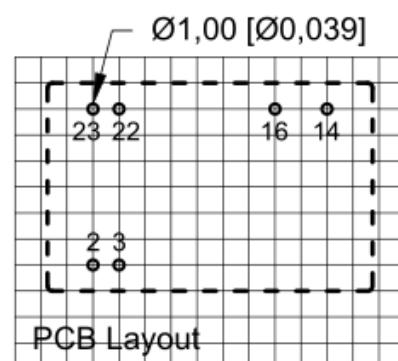

Note: The grid distance :2.54\*2.54mm

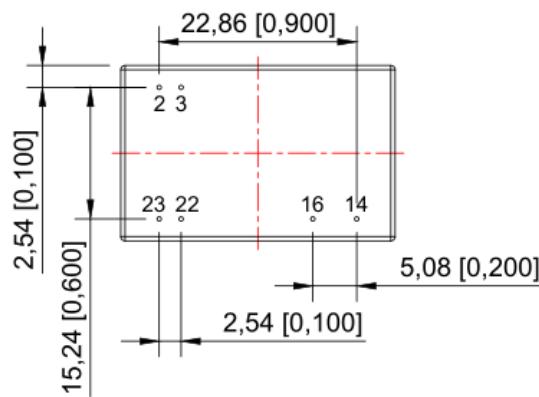

Bottom view

Note:

Size unit: mm[inch]




Pin section tolerance:  $\pm 0.1$  [ $\pm 0.004$ ]

Unmarked tolerance:  $\pm 0.25$  [ $\pm 0.01$ ]

The device layout is for reference only.

Pin mode	
Pin	Single(S)
2,3	GND
14	+XXVDC
16	0V
22,23	Vin

WRTD\_D\_-5W/6WH2 Series Dimensions

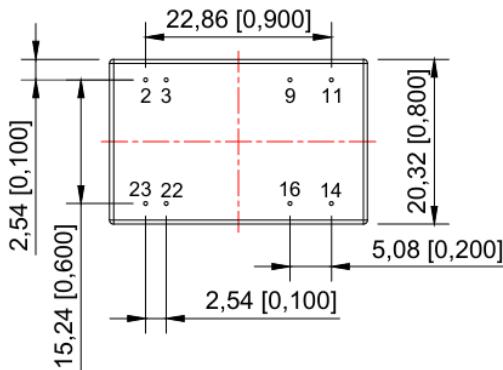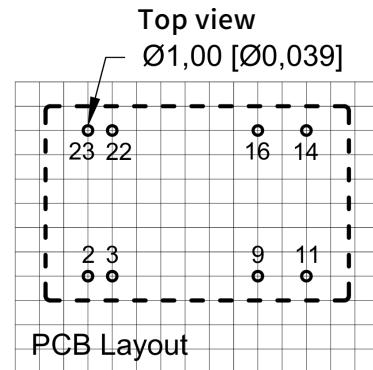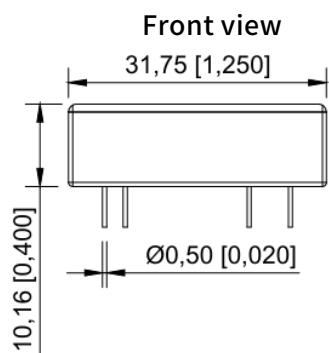

Pin mode	
Pin	Dual(D)
2,3	GND
9	COM
11	-XXVDC
14	+XXVDC
16	COM
22,23	Vin

Note:

Size unit: mm[inch]

Pin section tolerance:  $\pm 0.1 [\pm 0.004]$

Unmarked tolerance:  $\pm 0.25 [\pm 0.01]$

The device layout is for reference only.

## Application

Railway communication, display, monitoring equipment, petrochemical, industrial control, remote DC power supply system, switching system and other communication equipment.

## Selection Guide

Model	Input (VDC)	Output (Vo±2%)	Current (mA)	Efficiency (%)	Isolation (VDC)
WRTD_S3.3-5W/6WH2	5(4.5-9)	3.3	1515/1818	≥73	1500
WRTD_S05-5W/6WH2		5	1000/1200	≥78	1500
WRTD_S12-5W/6WH2		12	417/500	≥81	1500
WRTD_S15-5W/6WH2		15	333/400	≥82	1500
WRTD_D05-5W/6WH2		±5	±500/±600	≥78	1500
WRTD_D12-5W/6WH2		±12	±209/±250	≥81	1500
WRTD_D15-5W/6WH2		±15	±167/±200	≥82	1500
WRTD_S3.3-5W/6WH2		3.3	1515/1818	≥73	1500
WRTD_S05-5W/6WH2	12(9-18) 24(18-36) 48(36-75)	5	1000/1200	≥78	1500
WRTD_S12-5W/6WH2		12	417/500	≥81	1500
WRTD_S15-5W/6WH2		15	333/400	≥82	1500
WRTD_S24-5W/6WH2		24	208/250	≥82	1500
WRTD_D05-5W/6WH2		±5	±500/±600	≥78	1500
WRTD_D12-5W/6WH2		±12	±209/±250	≥81	1500
WRTD_D15-5W/6WH2		±15	±167/±200	≥82	1500

Note: Our company customizes module power supplies with any input or output for customers. If you have other output voltage requirements, please contact our company. Unless otherwise specified, the input =Vi. The characteristics of the module power supply should comply with the provisions of Table 1 and be applicable to the full temperature range (-40°C≤Tc≤85°C).

## Electrical Characteristics

Characteristic	Symbol	Conditions Vi , -40°C≤Tc≤85 (Unless otherwise specified)	Min	Max	Unit
Output Voltage	Vo	Full load	Vo-2%	Vo+2%	V
Output Current	Io(max)	—	—	P(Power)/ U(Output voltage)	A
Output Ripple voltage	Vp-p	Full Load, Vi, BW=20MHz, Normal Temperature	—	200	mV
Output Noise Voltage	Vp-p	Full Load, Vi, BW=20MHz, Normal Temperature	—	250	mV
Voltage Regulation	Sv	Vimin、Vi、Vimax, Full Load	—	±2	%
Load Regulation	Si	Vi, Io=(10%~100%),3.3V/5V, ±5V	—	±3	%
		Vi, Io=(10%~100%),Other outputs		±2	
Efficiency	η	Vi, Full Load, Normal Temperature	73	—	%
Insulation Resistance	RI	Input-output, insulation voltage 500VDC	1000	—	MΩ

## Mechanical Specifications


Size	31.75 x 20.32 x 10.16 mm
------	--------------------------

## General Specifications


EMC Specifications	Magnetic Field Sensitivity Test	GB6833.2-87
	Electrostatic Discharge Sensitivity Test	GB6833.3-87
	Radiation Sensitivity Test	GB6833.5-87
	Conduction Sensitivity Test	GB6833.6-87
Temperature Drift	$\leq \pm 0.02\%/\text{°C}$	
Storage Temperature	-40°C~125°C	
Input Frequency	200KHz- 400KHz	
Humidity	10%~90%RH	
MTBF	>300000H	

## Typical Characteristic Curves


Temperature chart

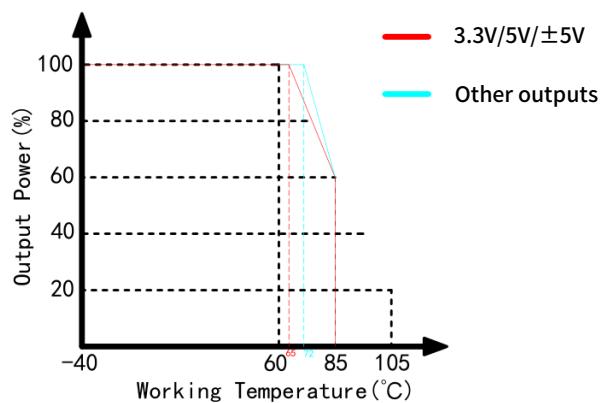

Efficiency/load graph

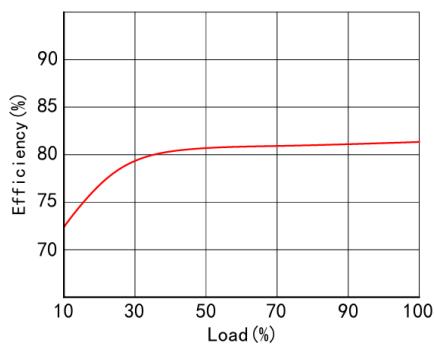


Efficiency/input voltage graph

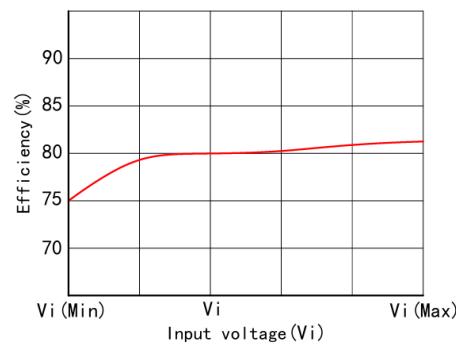

Typical Application

Design Reference

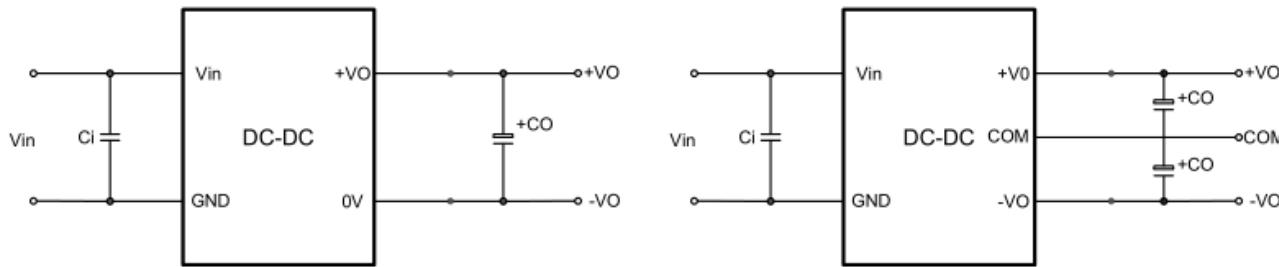

Recommendation Test

Filter: In some circuits that are sensitive to noise and ripple, an external filter capacitor can be connected to the DC/DC input and output terminals to reduce the impact of ripple on the system, but the value of the filter capacitor should be appropriate, if the capacitor is too large, it is likely to cause startup problems, for each output, under the condition of ensuring safe and reliable operation, the maximum capacitance of the filter capacitor can be referred to the external capacitance table. In order to obtain very low ripple, an "LC" filter network can be connected to the input and output end of the DC/DC converter, so that the filtering effect will be better, and it should be noted that the size of the inductance value and the frequency of the "LC" filter network should be staggered from the frequency of the DC/DC module power supply to avoid mutual interference. For each output channel, it is advisable to verify the condition of its external capacitor while ensuring safe and reliable operation. For further details, please refer to Table 1.


Vin (VDC)	Vout (VDC)	Ci ( $\mu$ F)	Co ( $\mu$ F)
5(4.5-9)	3.3/5	100 $\mu$ F/50V	47 $\mu$ F/16V
	12/15		22 $\mu$ F/25V
	$\pm 5/\pm 12$		22 $\mu$ F/25V
	$\pm 15$		22 $\mu$ F/50V
12(9-18) 24(18-36)	3.3/5	100 $\mu$ F/50V	47 $\mu$ F/16V
	12/15		22 $\mu$ F/25V
	24		22 $\mu$ F/50V
	$\pm 5/\pm 12$		22 $\mu$ F/25V
	$\pm 15$		22 $\mu$ F/50V
48(36-75)	3.3/5	47~100 $\mu$ F/100V	47 $\mu$ F/16V
	12/15		22 $\mu$ F/25V
	24		22 $\mu$ F/50V
	$\pm 5/\pm 12$		22 $\mu$ F/25V
	$\pm 15$		22 $\mu$ F/50V

The recommended values for the external filter capacitors are specified in Table 1.

## Notice

### Package

This series module is packaged by packaging tube.

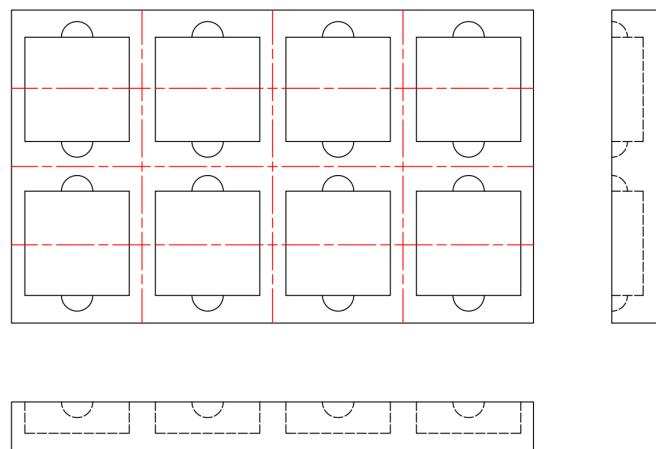

### Transport

The package containing the module is allowed to be transported by any means of transport, which should avoid direct rain and snow and mechanical damage.

### Storage

The module should be stored in a warehouse where the ambient temperature is -40 degrees ~ 125 degrees, the relative humidity is 20%~95%, and the surrounding environment is free from acidic, alkaline and other harmful gases.

Note: The above are the performance indicators of the product series listed in this manual. Some indicators of non-standard products may exceed the above requirements, so if there is any inconsistency between the manual and the product specification documents, please refer to the specification documents. If you have special needs, please contact us directly.